

## DPP

DAILY PRACTICE PROBLEMS

Class : XII<sup>th</sup>

Date :

### Solutions

Subject : PHYSICS

DPP No. : 1

### Topic :- WAVE OPTICS

1

(d)

$$d \sin \theta = n\lambda$$

$$0.3 \times 10^{-3} \times \theta = 6000 \times 10^{-10}$$

$$\theta = 2 \times 10^{-3} \text{ rad}$$

2

(a)

$$I_0 = R^2 = \frac{R_2^2}{4}$$

Number of HPZ covered by the disc at  $b = 25 \text{ cm}$

$$n_1 b_1 = n_2 b_2$$

$$n_2 = \frac{n_1 b_1}{b_2} = \frac{1 \times 1}{0.25} = 4$$

Hence the intensity at this point is

$$I = R'^2 = \left(\frac{R_5}{2}\right)^2 = \left(\frac{R_5}{R_4} \times \frac{R_4}{R_3} \times \frac{R_3}{R_2}\right)^2 \times \left(\frac{R_2}{2}\right)^2$$

$$I = (0.9)^6 I_0$$

$$I_1 = 0.531 I_0$$

Hence the correct answer will be (a)

3

(c)

$$I = I_{\max} \cos^2 \left(\frac{\phi}{2}\right)$$

$$\therefore \frac{I_{\max}}{4} = I_{\max} \cos^2 \frac{\phi}{2}$$

$$\cos \frac{\phi}{2} = \frac{1}{2}$$

$$\text{Or } \frac{\phi}{2} = \frac{\pi}{3}$$

$$\therefore \phi = \frac{2\pi}{3} = \left(\frac{2\pi}{\lambda}\right) \cdot \Delta x \quad \dots (i)$$

Where  $\Delta x = d \sin \theta$

Substituting in Eq. (i) we get,

$$\sin \theta = \frac{\lambda}{3d}$$

$$\text{Or } \theta = \sin^{-1} \left(\frac{\lambda}{3d}\right)$$

4

(a)

$$\frac{E_0}{B_0} = c. \text{ also } k = \frac{2\pi}{\lambda} \text{ and } \omega = 2\pi\nu$$

These relation gives  $E_0 k = B_0 \omega$

5

(a)

For diffraction to be observed, size of aperture must be of the same order as wavelength of light

6

(b)

Infrasonic waves are mechanical waves



7

(a)

$$\beta = \frac{\lambda D}{d} \Rightarrow \beta \propto \lambda$$

8

(d)

When two waves of same frequency, same wavelength and same velocity moves in the same direction. Their superposition results in the interference. The two beams should be monochromatic.

9

(d)

Let  $n$ th minima of 400 nm coincides with  $m$ th minima of 560 nm then

$$(2n - 1)400 = (2m - 1)560 \Rightarrow \frac{2n - 1}{2m - 1} = \frac{7}{5} = \frac{14}{10} = \frac{21}{15}$$

i. e., 4th minima of 400 nm coincides with 3rd minima of 560 nm

The location of this minima is

$$= \frac{7(1000)(400 \times 10^{-6})}{2 \times 0.1} = 14 \text{ mm}$$

Next, 11th minima of 400nm will coincide with 8th minima of 560 nm

Location of this minima is

$$= \frac{21(1000)(400 \times 10^{-6})}{2 \times 0.1} = 42 \text{ mm}$$

$\therefore$  Required distance = 28 mm

10

(b)

$$\frac{I_{\max}}{I_{\min}} = \frac{4 (a_1 + a_2)^2}{(a_1 - a_2)^2}$$

$$\text{Or } \frac{a_1 + a_2}{a_1 - a_2} = \frac{2}{1}$$

$$\text{Or } a_1 + a_2 = 2a_1 - 2a_2$$

$$\text{Or } a_1 = 3a_2$$

$$\therefore \frac{I_1}{I_2} = \frac{a_1^2}{a_2^2} = \frac{(3a_2)^2}{a_2^2} = \frac{9}{1}$$

$$\therefore \frac{a_1}{a_2} = \frac{3}{1}$$

11

(c)

Wave theory of light is given by Huygen

12

(c)

Interference fringes are bands on screen  $XY$  running parallel to the length of slits. Therefore, the locus of fringes is represented correctly by  $W_3W_4$ .

13

(b)

The angular distance ( $\theta$ ) is given by

$$\theta = \frac{\lambda}{d}$$

$$\theta = 2^\circ = \frac{\pi}{180} \times 2, \lambda = 6980 \text{ \AA}$$

$$= 6980 \times 10^{-10} \text{ m}$$

$$\Rightarrow d = \frac{\lambda}{\theta} = \frac{6980 \times 10^{-10} \times 180}{3.14 \times 2}$$

$$= 1.89 \times 10^{-5} \text{ mm}$$

$$\Rightarrow d = 2 \times 10^{-5} \text{ mm}$$

15

(a)

$$\beta = \frac{\lambda D}{d} \Rightarrow (0.06 \times 10^{-2}) = \frac{\lambda \times 1}{1 \times 10^{-3}} \Rightarrow \lambda = 6000 \text{ \AA}$$

16

(c)

Given,  $I_1 = I$  and  $I_2 = 9I$

$$\begin{aligned} \text{Maximum intensity} &= (\sqrt{I_1} + \sqrt{I_2})^2 \\ &= (\sqrt{I} + \sqrt{9I})^2 = 16I \end{aligned}$$

$$\begin{aligned} \text{Minimum intensity} &= (\sqrt{I_1} - \sqrt{I_2})^2 = (\sqrt{I} - \sqrt{9I})^2 = 4I \end{aligned}$$


18

(a)

The diffraction pattern of light waves of wavelength ( $\lambda$ ) diffracted by a single, long narrow slit of width is shown. For first minimum.

$$e \sin \theta = \lambda$$

$$\sin \theta = \frac{\lambda}{e}$$

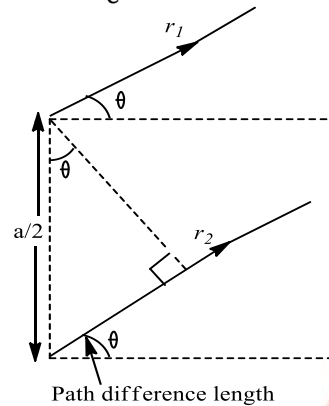

When  $e$  is decreased for same wavelength,  $\sin \theta$  increases, hence  $\theta$  increases. Thus, width of central maxima will increase.

20

(d)

Intensity of EM wave is given by

$$I = \frac{P}{4\pi R^2} = v_{av} \cdot c = \frac{1}{2} \epsilon_0 E_0^2 \times c$$

$$\Rightarrow E_0 = \sqrt{\frac{P}{2\pi R^2 \epsilon_0 c}}$$

$$\begin{aligned} &= \sqrt{\frac{800}{2 \times 3.14 \times (4)^2 \times 8.85 \times 10^{-12} \times 3 \times 10^8}} \\ &= 54.77 \frac{\text{V}}{\text{m}} \end{aligned}$$

### ANSWER-KEY

|    |    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|----|
| Q. | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
| A. | D  | A  | C  | A  | A  | B  | A  | D  | D  | B  |
| Q. | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |



|    |   |   |   |   |   |   |   |   |   |   |
|----|---|---|---|---|---|---|---|---|---|---|
| A. | C | C | B | B | A | C | D | A | A | D |
|    |   |   |   |   |   |   |   |   |   |   |



SMARTLEARN  
COACHING